

# Network Video Recorder

NR-E4-16B1/32B1/64B1



\*Images shown are for illustration purposes only and may not be an exact representation of the product.

## FEATURES

- Support Advance H.265, H.265, H.264 video formats
- 16/32/64-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- Support 2 HDMI and 2 VGA. VGA1 and HDMI1 simultaneous output, VGA2 and HDMI2 simultaneous output. VGA1/HDMI1 and VGA2/HDMI2 independent output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

## TECHNICAL SPECIFICATIONS

### DECODING

Decoding Format	Advance H.265, H.265, H.264		
Decoding Capability	Smart Off: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 10 x 6MP@30, 12 x 4MP@30, 16 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30 Smart On: 1 x 32MP@30, 3 x 16MP@30, 4 x 12MP@30, 6 x 4K@30, 8 x 6MP@30, 9 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 24 x 1080P@30, 32 x 720P@30	Smart Off: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 64 x 720P@30 Smart On: 1 x 32MP@30, 3 x 16MP@30, 4 x 12MP@30, 6 x 4K@30, 8 x 6MP@30, 9 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 24 x 1080P@30, 48 x 720P@30, 64 x D1	Smart Off: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 64 x 720P@30 Smart On: 1 x 32MP@30, 3 x 16MP@30, 4 x 12MP@30, 6 x 4K@30, 8 x 6MP@30, 9 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 24 x 1080P@30, 48 x 720P@30, 64 x D1
Decoding Capability Description	The resolution of each channel cannot exceed 8192 pixels in length or width		
Audio Compression	G.711A, G.711U		

### NETWORK

Incoming Bandwidth	Smart Off: 384Mbps Smart On: 200Mbps
Outgoing Bandwidth	Smart Off: 384Mbps Smart On: 200Mbps
Remote Users	128
Protocols	TCP/IP, P2P, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS, RTSP, 802.1x, IPv6, IPv4
Browser(Plugin)	Windows: IE (IE10/ 11), Firefox (version 52.0 and above), Chrome (version 45 and above), Edge (version 79 and above)

## VIDEO / AUDIO INPUT

IP Video Input	16-ch: NR-E4-16B1	32-ch: NR-E4-32B1	64-ch: NR-E4-64B1
RCA Audio Input	1-ch		

## VIDEO / AUDIO OUTPUT

HDMI Output	4K (3840 × 2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
VGA Output	1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
RCA Audio Output	2-ch		
Liveview Display	1/4/6/8/9/16	HDMI1 and VGA1: 1/4/6/8/9/16/25/32; HDMI2 and VGA2: 1/4/6/8/9/16	HDMI1 and VGA1: 1/4/6/8/9/16/25/36/64 ; HDMI2 and VGA2: 1/4/6/8/9/16
Corridor Mode Screen	3/4/5/7/9/10/12/16	HDMI1 and VGA1: 3/4/5/7/9/10/12/16/32; HDMI2 and VGA2: 3/4/5/7/9/10/12/16	HDMI1 and VGA1: 3/4/5/7/9/10/12/16/32 HDMI2 and VGA2: 3/4/5/7/9/10/12/16

## Two - way Audio

Two-way Audio	1-ch,RCA(Using the audio input and output)
---------------	--

## SNAPSHOT

FTP/Schedule/Event Snapshot	16-ch snapshot,up to 1080P resolution
-----------------------------	---------------------------------------

## RECORDING

Recording Resolution      32MP/16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF

Num of Concurrent Playback      32-ch

Synchronous Playback in Local      16-ch

## SMART

VCA Detection by IPC      Face Detection, Vehicle Detection, SIP (Intrusion Detection, Cross Line Detection, Enter Area, Leave Area), Ultra Motion Detection (UMD), Temperature Detection (Fire Detection, Smoking Detection, Temperature Measurement, Smoke and Fire Detection), People Counting (People Flow Counting, Crowd Density Monitoring), Video Metadata, Traffic Monitoring

Smart by NVR      Face Detection; face detection; Smart Intrusion Prevention (SIP); Smart Motion Detection (SMD)

VCA Search      Motor Vehicle Search; Non-Motor Vehicle Search; Human Body Search; General Search; People Counting Report; Heat Map; SmartSearch+; AcuSearch

Smart by IPC      All channels (up to 16 images/s in total)  
Face Detection, face detection, Vehicle Detection, Temperature Detection, SIP, SMD, Video Metadata, Traffic Monitoring

Search by Image      Support

Vehicle Picture Library      Up to 5 vehicle picture libraries, with up to 25,000 vehicle pictures in total

SIP by NVR      2-ch

SMD by NVR      4-ch

## SMART

Capacity of Snapshot Records

3 millions records for face snapshot, 2 millions records for vehicle snapshot, 2 millions records for SIP

## ALARM

General Alarm

Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Alarm Input, Audio Detection

Alert Alarm

IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal, Array Damaged, Array Degraded

## GUI LANGUAGE

GUI Language

38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian

## HARD DISK

SATA

4 SATA Interfaces

Capacity

Up to 16TB for each HDD (The maximum HDD capacity varies with environment temperature)

Disk Group

Support

Redundant Storage

Support

Disk Array Type

RAID 0,1,5

## EXTERNAL INTERFACE

Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
Network Working Mode	Multi-access, load balance, network fault tolerance
USB	Front panel: 2 x USB2.0; Rear panel: 2 x USB3.0
RS485	1
RS232	1
Alarm In	16-ch
Alarm Out	10-ch
eSATA	1
Power Output	12V
Power Supply	AC 100~240V


## WORKING ENVIRONMENT

Working Temperature	-10 °C ~ 55 °C (14 °F ~ 131 °F)
Working Humidity	≤ 90% RH (non-condensing)
Power Consumption (without HDD)	≤ 50W


## DIMENSIONS

Weight (without HDD)	≤ 5.5Kg (12.1lb)
Dimensions	442mm × 432mm × 86mm (17.4"×17.0"×3.4")

## DIMENSIONS

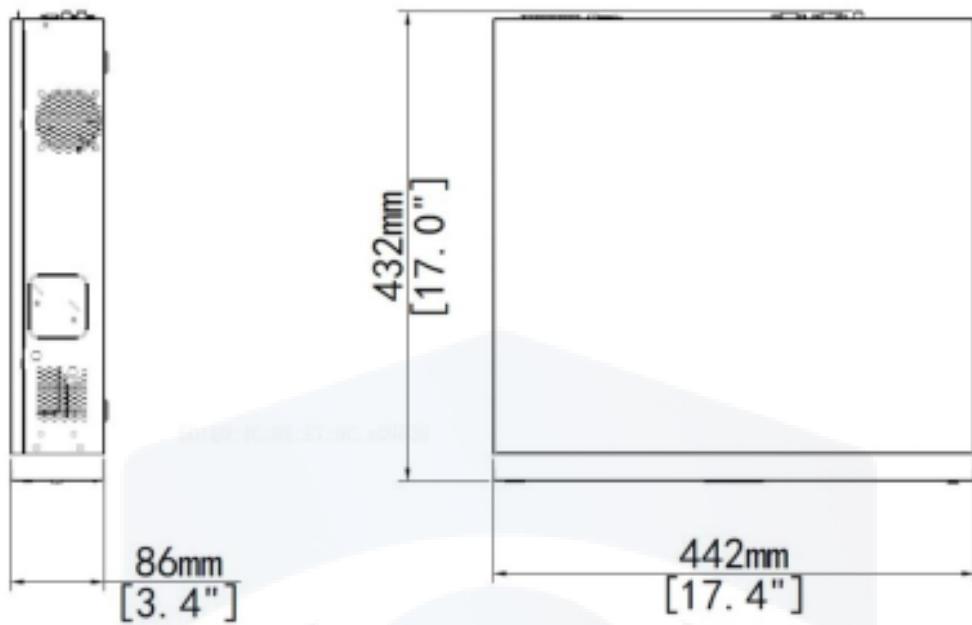

## REAR PANEL

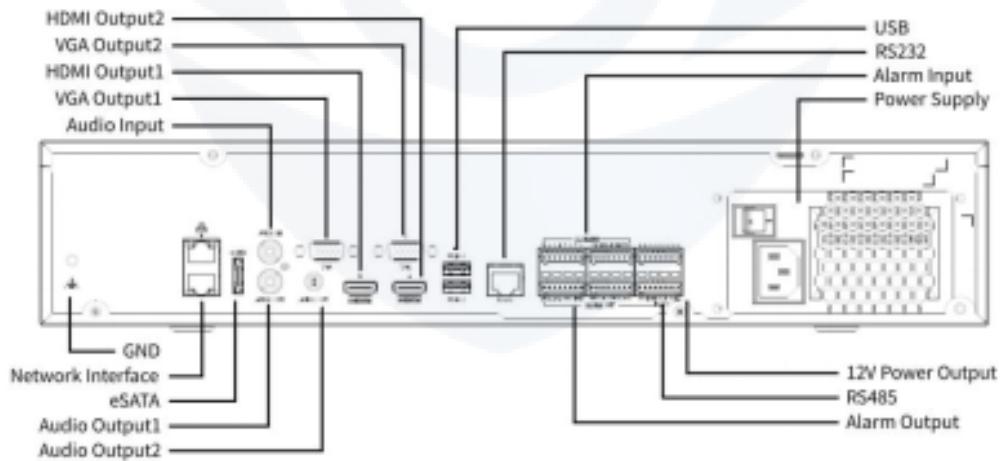

### UNEEVIU TECHNOLOGIES INDIA PVT LTD

SadguruVilla - 123/128, Gorai, Borivali west, Mumbai MH - 400091 (INDIA)

Email: [Support@uneeviu.com](mailto:Support@uneeviu.com)

[www.uneeviu.com](http://www.uneeviu.com)

\*Product specifications and availability are subject to change without notice.

\*uneeviu shall not be held liable/responsible for any typographical error and reserve right to change the content without prior notice, despite our best effort to make the content error-less