

Network Video Recorder

NR-C1-8E-P8-IA



*Images shown are for illustration purposes only and may not be an exact representation of the product.

FEATURES

- Support Advance H.265, H.265, H.264 video formats
- 8-channel input
- Plug & Play with 4/8 independent PoE network interfaces
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- Support HDMI and VGA simultaneous output
- Up to 12 Megapixels resolution recording
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

TECHNICAL SPECIFICATIONS

DECODING

Decoding Format	Advance H.265, H.265, H.264
Decoding Capability	Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30 Smart On: 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30
Audio Compression	G.711A, G.711U

NETWORK

Incoming Bandwidth	80Mbps
Outgoing Bandwidth	80Mbps
Remote Users	128
Protocols	TCP/IP, P2P, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, RTSP, IPv6, IPv4
Browser(Plugin)	Windows: IE (IE10/ 11), Firefox (version 52.0 and above), Chrome (version 45 and above), Edge (version 79 and above)

VIDEO / AUDIO INPUT

RCA Audio Input	1-ch
IP Video Input	8-ch

PERIPHERAL INPUT

POS Support

VIDEO / AUDIO OUTPUT

HDMI Output	4K(3840x2160)/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
VGA Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
RCA Audio Output	1-ch
Liveview Display	1/4/6/8/9
Corridor Mode Screen	3/4/5/7/9

Two - way Audio

Two-way Audio 1-ch,RCA(Using the audio input and output)

SNAPSHOT

FTP/Schedule/Event Snapshot 4-ch snapshot,up to D1 resolution

RECORDING

Recording Resolution 12MP/8MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF

Num_of Concurrent Playback 16-ch

SMART

Smart by IPC	All channels (up to 8 images/s in total)Face Detection,Face Comparison,Vehicle Detection,SIP,SMD, Traffic Monitoring
Smart by NVR	Face Comparison, Smart Intrusion Prevention (SIP), Smart Motion Detection(SMD)
VCA Search	Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, Heat Map
by NVR	1-ch
Search by Image	Support
SIP by NVR with normal cameras	2-ch
SMD by NVR with normal cameras	4-ch

ALARM

Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
-------------	--

GUI Language

GUI Language	38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian
--------------	---

HARD DISK

SATA	1 SATA Interfaces
Capacity	Up to 10TB for each HDD (The maximum HDD capacity varies with environment temperature)

EXTERNAL INTERFACE

Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB	Rear panel: 1 x USB2.0, 1 x USB3.0
RS485	N/A
RS232	N/A
Alarm In	N/A
Alarm Out	N/A
Power Supply	DC 52V/1.8A
Power Switch	Support

PoE


PoE Interface	8 RJ45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port, Max 75W in total
Supported Standard	IEEE 802.3at, IEEE 802.3af

WORKING ENVIRONMENT


Working Temperature	-10 °C ~ 55 °C (14 °F ~ 131 °F)
Working Humidity	≤ 90% RH (non condensing)
Power Consumption (without HDD)	≤12W

DIMENSIONS

Weight (without HDD)	≤ 2.7Kg (6.0lb)
Height	1U
Dimensions	260mm × 222mm × 47mm (10.2"×8.7"×1.8")

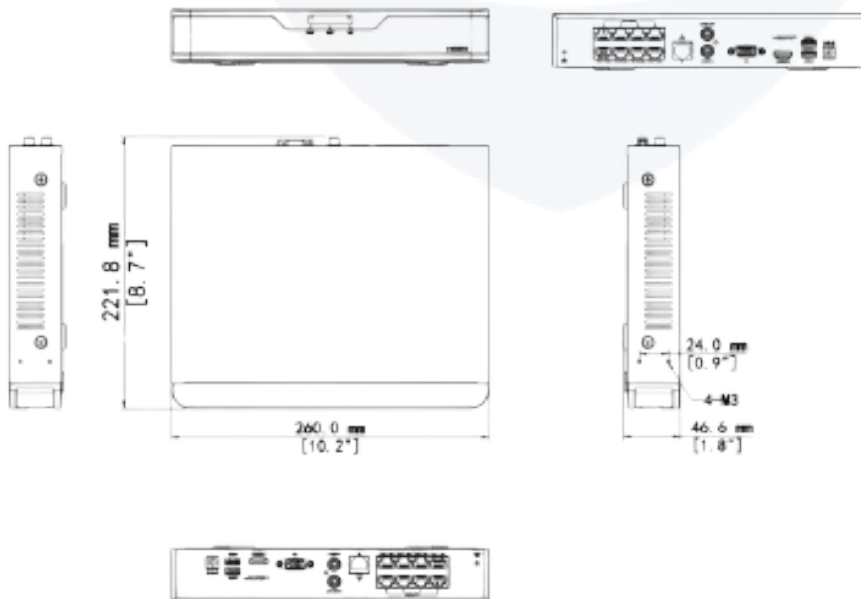

Rear Panel

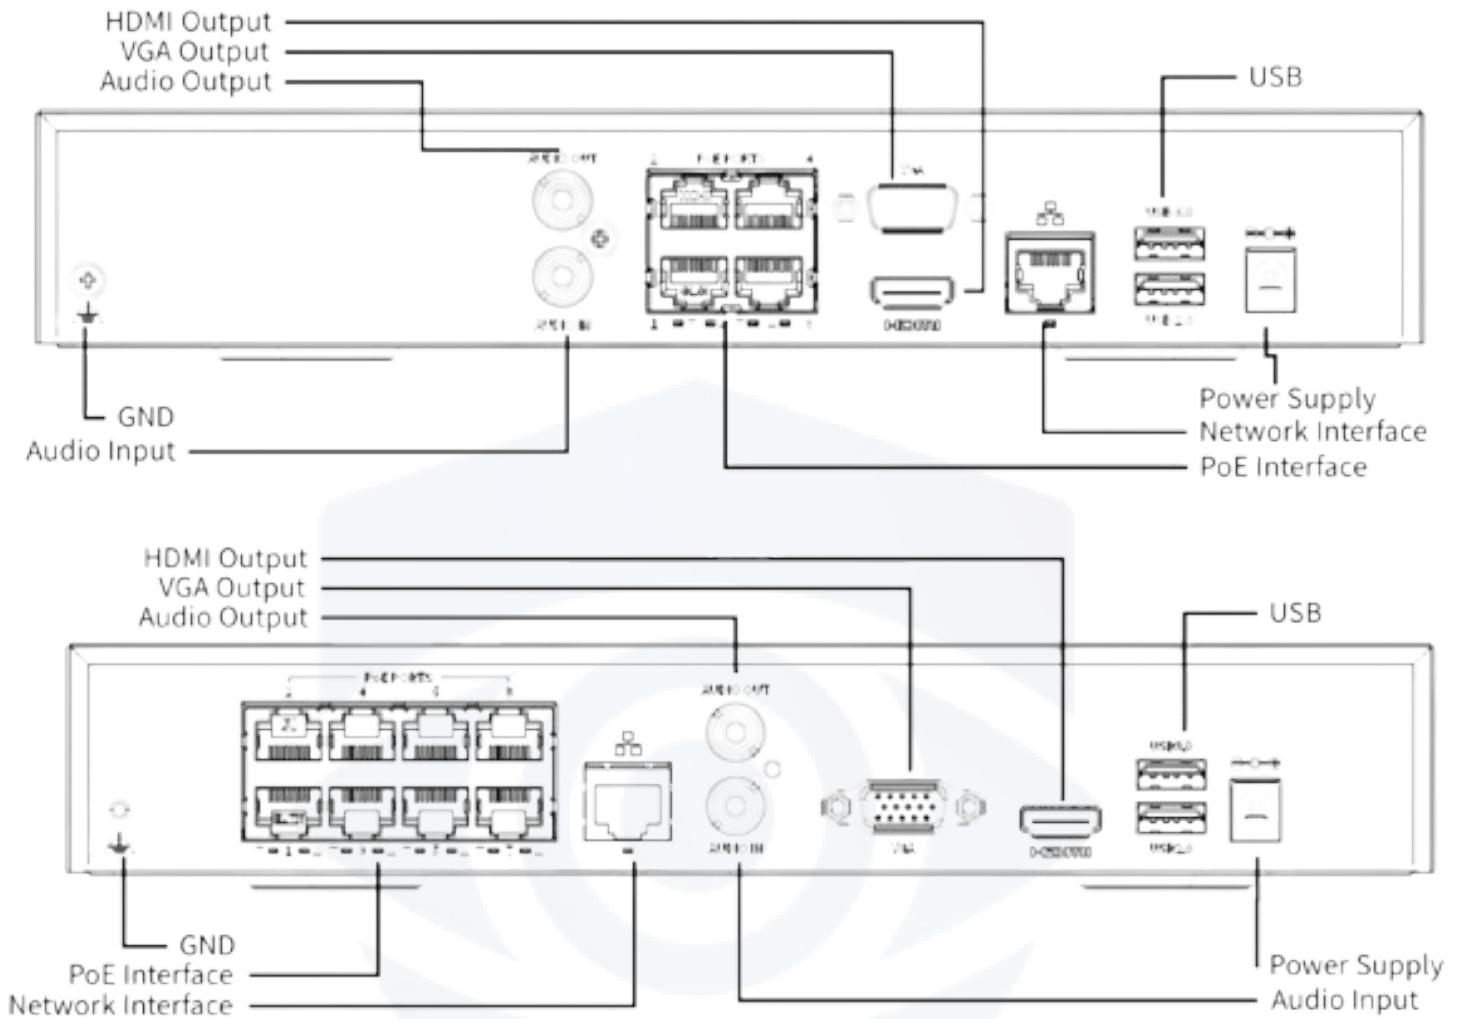

UNEVIU TECHNOLOGIES INDIA PVT LTD

SadguruVilla - 123/128, Gorai, Borivali west, Mumbai MH - 400091 (INDIA)

Email: Support@uneeviu.com

www.uneeviu.com

*Product specifications and availability are subject to change without notice.

*uneeviu shall not be held liable/responsible for any typographical error and reserve right to change the content without prior notice, despite our best effort to make the content error-less